

# E-ASSIST


## ENVOY 200



### FEATURES

- 8 Speed
- Econ Range - 55 miles
- Avg Range - 40 miles
- Kickstand, fenders & rack

PART #	MODEL	SIZE	COLOR
89-105-9007	ENVOY 200	18	MATTE DARK GRAY
89-105-9008	ENVOY 200 LADIES	15.5	MATTE DARK GRAY
89-105-9009	ENVOY 200 LADIES	17	MATTE DARK GRAY

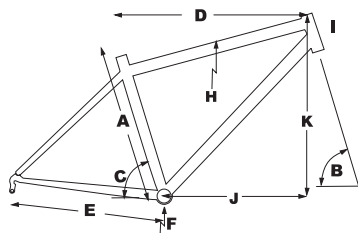

### GEOMETRY

SIZE	A s/t c-t	B h/t°	C s/t°	D t/ effectv	E c/s	F BB Height	H s.o.	I h/t L	K Stack	J Reach
M/18	457 / 18	71°	74°	565 / 22.2	450 / 17.7	290 / 11.4	774 / 30.5	150 / 5.9	569 / 22.4	402 / 15.8
S/15.5L	394 / 15.5	71°	74°	548 / 21.6	450 / 17.7	290 / 11.4	0 / 0	115 / 4.5	535 / 21.1	395 / 15.5
M/17L	432 / 17	71°	74°	555 / 21.9	450 / 17.7	290 / 11.4	0 / 0	130 / 5.1	550 / 21.7	402 / 15.8

### BIKE SPECS

Frame	4130 Double Butted CrMo Tubing w/Carrier Bosses
Fork	Full CrMo Unicrown, Low-rider and Fender Bosses, Straight Blade
Headset	FSA Threadless 1-1/8", Zero Stack
Rims	Weinmann ZAC2000, 700x36H, Double Wall w/CNC Side Wall
Hub, Front	Aluminum QR
Hub, Rear	Bafang, Drum Motor
Tires	Kenda Kwick Journey, 700 x 35c w/K-Shield Anti-Puncture, 60TPI
Spokes	14G Stainless Black, 36x36, Rear 13G
Derailleur, Rear	Shimano Altus M310
Shifters	Shimano Twist
Chain	KMC X8
Crankset	Samox Forged, 36T w/Guard, 175mm
Motor	Bafang RMG020-500DC, 48V x 500W, 45Nm, Class II
Battery	Lithium 48V x 10.5Ah, 504Wh
Freewheel / Cassette	Shimano CS-HG31-8, 11-32T, 8-Speed
Pedals	Wellgo Platform w/Non-slip Tread, DU Bearings
Seatpost	Aluminum Micro-Adjust, 27.2x350mm
Saddle	KHS Ultra Comfort
Handlebar	Aluminum Trekking, 30mm x 630mm, 31.8mm
Stem	KHS Aluminum Threadless, 25 degree
Grips	Velo Dual density
Brake Levers	Bengal Aluminum Linear Pull Trekking 3 Finger w/Sensor Control
Brakes	Tektro Aluminum Linear Pull
Frame Size	M/18, Ladies: S/15.5, M/17
Extras	Kickstand, Fenders, Aluminum Rear Carrier, Bell